

Extended Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives


3101RA & 3701RA Series



3101RA6K;23000

Recommended Maximum Sanding Pad Size	Rated Speed	Exhaust Direction	Lever Style	MODEL NUMBER
2 Inch (50 mm) 1/4-20 Spindle Output Thread	23000 RPM	Side	Standard Lever	3101RA6;23000
			Safety Lever	3101RA6K;23000
		Rear	Standard Lever	3101RA6R;23000
			Safety Lever	3101RA6KR;23000
	15000 RPM	Side	Standard Lever	3701RA6;15000
			Safety Lever	3701RA6K;15000
		Rear	Standard Lever	3701RA6R;15000
			Safety Lever	3701RA6KR;15000

RIGHT ANGLE SANDERS

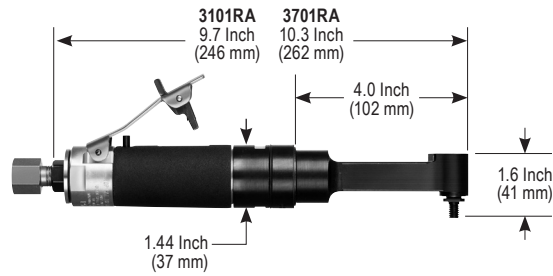

Verify the Maximum Rated Speed of the Sanding Accessory is Higher than the Maximum Rated Speed of the Tool.



0.7 H.P. (600 W)



3101RA: 25 cfm (11.8 L/s) Max
3701RA: 15 cfm (7.1 L/s) Free Speed
25 cfm (11.8 L/s) Max



2.0 Lbs. (0.9 Kg) Aluminum
2.4 Lbs. (1.1 Kg) Steel




1/4" NPT Inlet
3/8" (10 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

3101RA & 3701RA Alternate Options

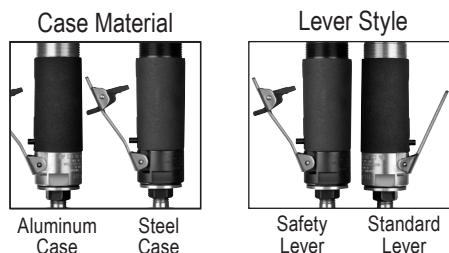

Surface Conditioning Abrasive Mounting

