

Extended Right Angle Sanders, Buffers & Polishers for Surface Finishing Abrasives

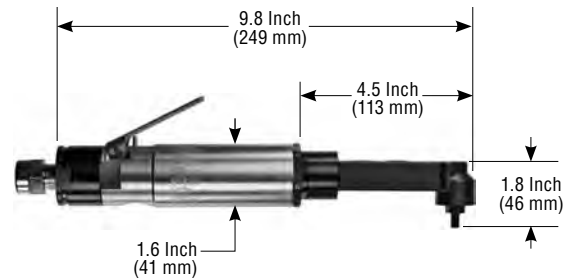
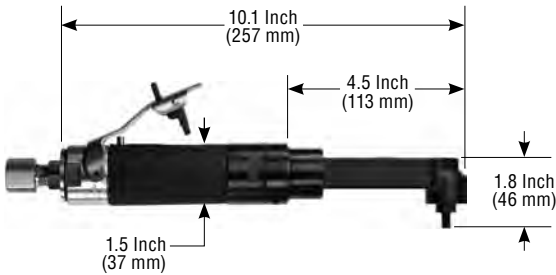
320RA Series


320RA6K;15000

420RA Series


420RA6R;13000
420RA6K;13000

Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER	Sanding Pad Size	Exhaust Direction	Lever Style	MODEL NUMBER
2 Inch (50 mm) 1/4-20 Spindle Output Thread	Side	Standard Lever	320RA6;20000	2 Inch (50 mm) 1/4-20 Spindle Output Thread	Side	Standard Lever	420RA6;13000
		Safety Lever	320RA6K;20000			Safety Lever	420RA6K;13000
	Rear	Standard Lever	320RA6R;20000		Rear	Standard Lever	420RA6R;13000
		Safety Lever	320RA6KR;20000			Safety Lever	420RA6KR;13000


 0.7 H.P.
(600 W)

 25 cfm
(11.8 L/s) Max

 2.1 Lbs. (1.0 Kg) Aluminum
2.5 Lbs. (1.1 Kg) Steel

 1/4" NPT Inlet
3/8" (10 mm) Hose Size

 1.2 H.P.
(900 W)

 35 cfm
(16.5 L/s) Max

 2.4 Lbs. (1.1 Kg) Aluminum
3.0 Lbs. (1.4 Kg) Steel

 3/8" NPT Inlet
1/2" (13 mm) Hose Size

STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual
- Wrenches (sizes based on options)

320RA Alternate Options



Aluminum Case Steel Case

320-420RA Alternate Options



Safety Lever Standard Lever

420RA Alternate Options



Aluminum Case Steel Case

Surface Conditioning Abrasive Mounting

