



## Floor Drills

### 400FD(X)M Series

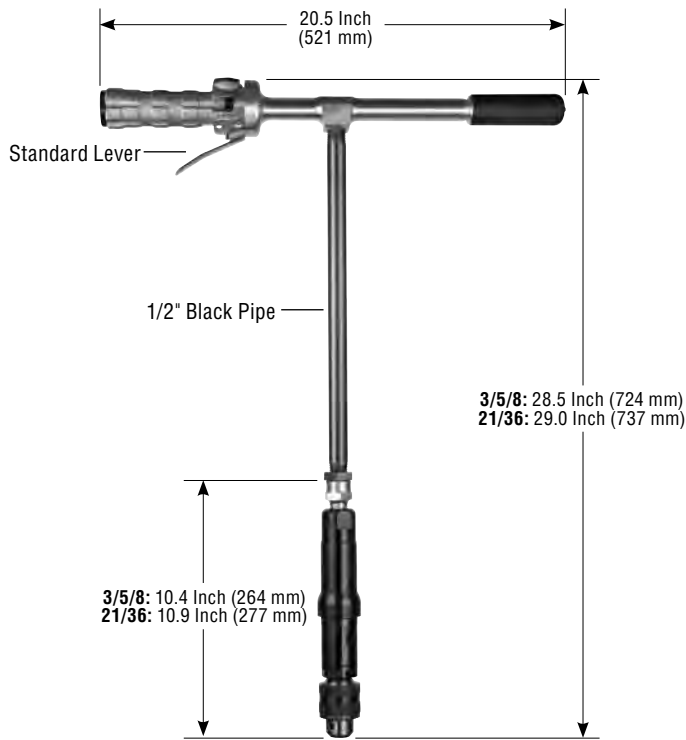

**400FD3ML;5500;D1/2;P15**

### 500FD1M Series

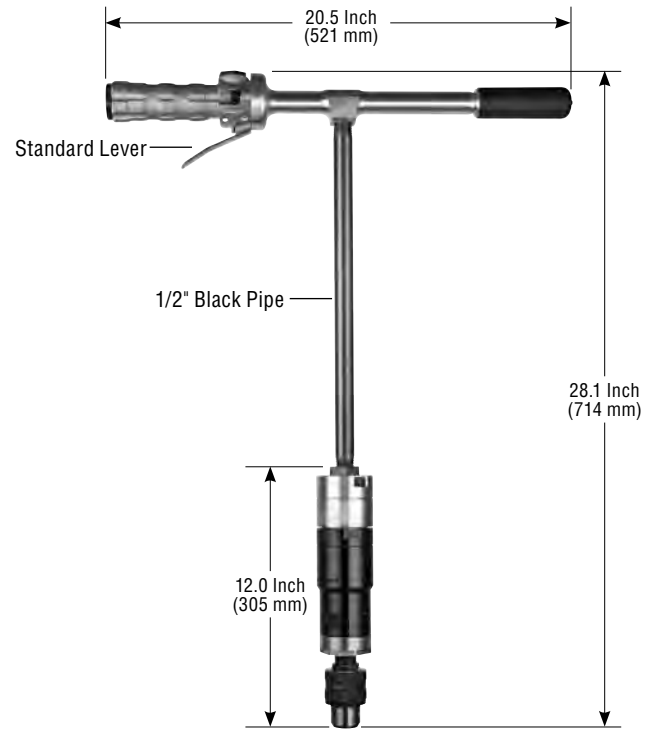

**500FD1ML;4000;D1/2;P15**

Output	Gear Ratio / Rated Speed	Lever Style	MODEL NUMBER	Output	Gear Ratio / Rated Speed	MODEL NUMBER
1/2" (13 mm) Drill Chuck	3:1 / 5500 RPM	Standard Lever	<b>400FD3M;5500;D1/2;P15</b>	1/2" (13 mm) Drill Chuck	4:1 / 4000 RPM	<b>500FD1ML;4000;D1/2;P15</b>
		Safety Lever	<b>400FD3MK;5500;D1/2;P15</b>			
	5:1 / 4000 RPM	Standard Lever	<b>400FD5M;4000;D1/2;P15</b>			
		Safety Lever	<b>400FD5MK;4000;D1/2;P15</b>			
	8:1 / 2500 RPM	Standard Lever	<b>400FD8M;2500;D1/2;P15</b>			
		Safety Lever	<b>400FD8MK;2500;D1/2;P15</b>			
	21:1 / 900 RPM	Standard Lever	<b>400FD21M;900;D1/2;P15</b>			
		Safety Lever	<b>400FD21MK;900;D1/2;P15</b>			
	36:1 / 550 RPM	Standard Lever	<b>400FD36M;550;D1/2;P15</b>			
		Safety Lever	<b>400FD36MK;550;D1/2;P15</b>			

**HP** 1.2 H.P. (900 W)

**Lbs** 3/5/8: 8.3 Lbs. (3.8 Kg)  
21/36: 8.5 Lbs (3.8 Kg)

**cfm** 35 cfm (16.5 L/s) Max

**SUPPLY** 1/2" NPT Inlet  
3/8" (10mm) Hose Size

**HP** 1.5 H.P. (1125 W)

**Lbs** 10.8 Lbs (4.9 Kg)

**cfm** 35 cfm (16.5 L/s) Max

**SUPPLY** 1/2" NPT Inlet  
1/2" (13mm) Hose Size

### STANDARD EQUIPMENT

- Tool
- Operating Instructions and Service Manual